



## Wireless LAN Access Point IEEE 802.11g/b Compatible

### **IEEE 802.11g/b Wireless LAN Access Point**

Acting as a bridge between the wired Ethernet and the 2.4GHz IEEE 802.11g/b wireless LAN, this wireless LAN access point can let your wireless LAN client stations access both the wired and the wireless network nodes.

### **WDS Bridge Mode (Repeater Mode)**

The WDS (Wireless Distributed System) function lets this access point act as an wireless LAN access point and repeater at the same time. Users can use this feature to build up a large wireless network in a large space like airports, hotels and schools ...etc. This feature is also useful when users want to bridge networks between buildings where it is impossible to deploy network cable connections between these buildings.

### **Station Mode (AP Client Mode)**

By setting this access point into station mode and connecting to a network device's Ethernet port, it can let a network device that originally only supports wired Ethernet access the wireless LAN easily without changing any configuration.

### **Robust Wireless LAN Security**

Except for the basic security control by using ESSID and 64/128 bit key length WEP encryption, this access point also supports the advanced security features, like MAC access control and hide ESSID. It provides a total solution for you to build up a secure wireless LAN network environment that can prevent from all kinds of hacker intrusion.


### **RP-SMA Detachable Antenna**

This access point provides a standard RP-SMA antenna connector that can let you apply all kinds of high gain antennas. This can help you enlarge your wireless LAN coverage.

### **Web Configuration**

You can configure this access point through the friendly Web user interface with a browser.

# Wireless LAN Access Point

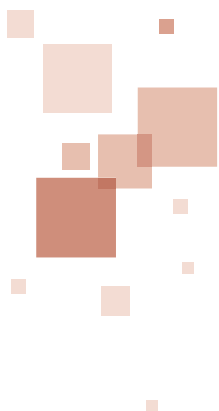

## Features

- Complies with the IEEE 802.11b (DSSS) 2.4GHz specification
- Supports 2.400~2.4835 GHz frequency band, 1~14 channels
- High data rate up to 54Mbps network speed
- Auto rate fallback in case of obstacles or interferences
- Supports WPA security enhanced function
- Supports WDS(Wireless Distributed System) bridge mode
- Provides station mode to act as a wireless LAN client station
- Supports roaming link integrity
- Supports authentication for wireless connectivity based on ESSID
- Provides 64/128 bit key length WEP data encryption
- Provides MAC access control
- Provides DHCP server
- Supports Web-based configuration
- Firmware upgradeable via Web
- Compact-size design

## Specification

Product	EW-7206APg
CPU	Realtek RTL8186
Flash	2 MB NOR Flash
RAM	8MB SDRAM
RF	Realtek RTL8225
LAN Port	10/100M UTP Port x 1
Antenna	RP-SMA Detachable Antenna x 1
Transmit Power	18 dBm
Power	12V DC, 0.5A Linear Power Adaptor
Dimension	30(H)*127(W)*96(D) mm
Temperature	10~40 °C
Humidity	10~90% (Non-Condensing)
Certification	FCC, CE

### Edimax Worldwide

Taiwan/Headquarters  
Edimax Technology Co. Ltd.  
TEL : 886-2-22995648  
FAX : 886-2-22995647  
E-mail : service@edimax.com.tw

China  
Beijing Edimax Science  
& Technology Co., Ltd.  
TEL : 8610-82665568  
FAX : 8610-82665325  
E-mail : support@edimax.com.cn

USA  
Edimax Computer Company  
TEL : 1-408-496-1105  
FAX : 1-408-980-1530  
E-mail : support@edimax.com

Latin America  
Edimax Latin America  
TEL : 1-786-845 8099  
FAX : 1-786-331 8490  
E-mail : sales\_latinamerica@edimax.com

Europe  
Edimax Technology Europe B.V.  
TEL : 31- 499-377344  
FAX : 31- 499-372647  
E-mail : support-europe@edimax.com.tw

U.K.  
Edimax Technology (UK) Ltd.  
TEL : +44-(0)-1908-255981  
FAX : +44-(0)-1908-255700  
E-mail : support-uk@edimax.com.tw

